


Professional-grade monitor for pros.

The VP2765-LED is one of ViewSonic's new LED Professional Series monitors that utilizes the power of true AMVA panel technology. High contrast ratio and super wide 178/178 degree viewing angles. This coupled with 1920x1080 resolution, makes the VP2765-LED the ultimate professional grade LCD monitor for medical facilities, scientific design, digital art, video production, architecture and any application where true color and total screen viewing is essential. Features DisplayPort and DVI inputs and 4-port USB hub for cluster free connectivity, ergonomic functions with pivot, height adjust, tilt, swivel and slim bezel make the VP2765-LED an amazing monitor.

VP2765-LED

27" PROFESSIONAL LED MONITOR

WITH AMVA PANEL TECHNOLOGY

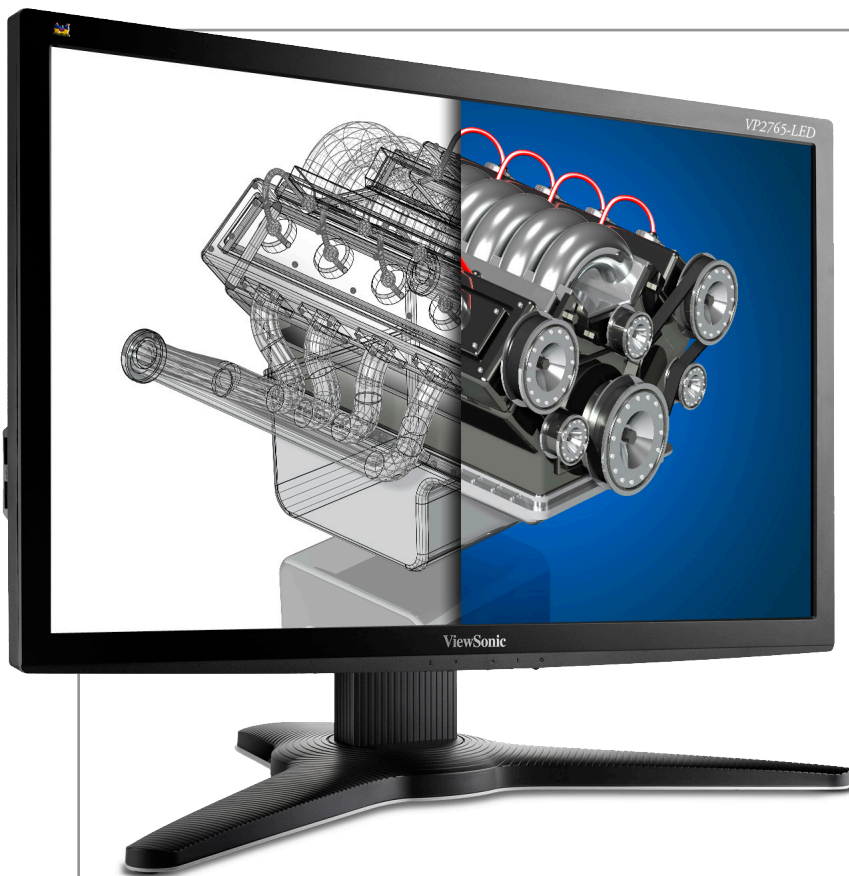

A HARD WORKING TOOL

- > **Full 27" widescreen with 1080p**
16:9 aspect ratio and auto detect 4:3 image view.
- > **178/178 degree super wide viewing angles**
No image distortion or color shifting even at extreme angles.
- > **Real color everywhere**
Capture true colors even from 178 degree angles with the VP2765-LED's AMVA panel.
- > **Up to 50% energy savings with LED backlight***
- > **Connections, connections**
Display Port and DVI-D digital inputs, as well as, 4-port USB hub provides all the connectivity you need to stay focused on the real work.
- > **Full ergonomics**
Pivot, height adjust, tilt and swivel for perfect ergonomics and comfort.
- > **Slim bezel for multi-monitor applications**
Seamless viewing for larger formats and increased productivity with multiple window options.




VIEWSONIC
PRODUCTS, PROGRAMS,
AND SERVICES

ViewSonic®
See the difference® 

VP2765-LED

27" PROFESSIONAL LED MONITOR WITH AMVA PANEL TECHNOLOGY

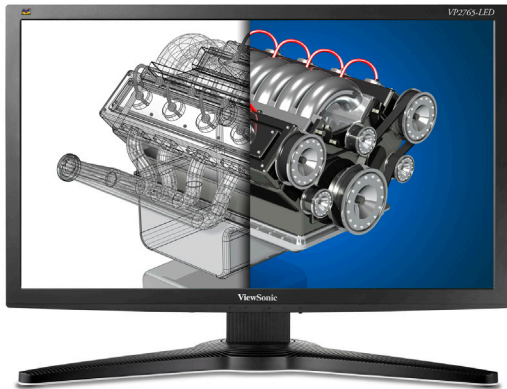

LCD

Type	27" Color TFT active matrix AMVA LED
Display Area	23.5" horizontal x 13.2" vertical; 27" diagonal
Optimum Resolution	1920x1080
Contrast Ratio	3000:1 static (typ), 20,000,000:1 dynamic
Viewing Angles	178° horizontal, 178 vertical @ contrast ratio > 10:1
Response Time	25ms (typ)
Light Source	Long life, 30,000 hrs. (typ)
Brightness	300 cd/m ² (typ)
Panel Surface	Anti-glare

VIDEO INPUT

Analog / Digital	RGB analog (75 ohms, 0.7/1.0 Vp-p) / DVI-D (HDCP) / DisplayPort
Frequency	F _H : 24~83kHz, F _V : 50~75Hz
Sync	H/V separated (TTL), composite, sync-on-green

COMPATIBILITY

PC	VGA up to 1920x1080 non-interlaced
Mac®†	Power Mac™ up to 1920x1080

CONNECTOR

Analog / Digital	15-pin mini D-sub / DVI-D / DisplayPort
USB	V2.0, 1-up/4-down
Power	Internal power; 3-pin AC plug (CEE22)

POWER

Voltage	AC 100~240V, 50~60Hz (auto switch)
Consumption	55W (typ), 33W (Eco-mode)

CONTROLS

Basic	Power, 2, up, down, 1
OnView®	Auto image adjust, contrast, brightness, input select (D-SUB, DVI), color adjust (sRGB, 9300K, 7500K, 6500K, 5000K, User color [R, G, B]), information, manual image adjust (H/V position, horizontal size, fine tune, sharpness, dynamic contrast, aspect ratio, eco mode), setup menu (language select, resolution notice, OSD position, OSD time out, OSD background) memory recall

ERGONOMICS

	Height adjustment range 5.3", tilt -5°/+20°, swivel range 120°, pivot 0-90°
--	---

OPERATING CONDITIONS

Temperature	32~104°F (0~40°C)
Humidity	20~90% (non-condensing)

DIMENSIONS (W x H x D)

Physical with stand	25.3" x 18.3" x 15.3" (642mm x 466mm x 388mm)
Physical without stand	25.3" x 15.4" x 2.6" (642mm x 391mm x 65mm)
Packaging	28.8" x 22.4" x 17.8" (732mm x 570mm x 451.8mm)

WEIGHT

Net with stand	18.6 lb. (8.5 kg)
Net without stand	11.8 lb. (5.7 kg)
Gross	26.3 lb. (12.0 kg)

VESA® MOUNT

	100mm x 100mm
--	---------------

REGULATIONS

	UL, CUL, FCC-B (ICES), CB, CE, ICES-003B, TUV/GS, TUV, TUV-S, NOM, GOST-R, HYGIENIC (20 copies), CECP, CCC, BSMI, PSB, C-TICK, SASO, WEEE, RoHS, ErP, ENERGY STAR®, TCO'05, EPEAT-Silver
--	--

RECYCLE/DISPOSAL

	Please dispose of in accordance with local, state or federal laws.
--	--

POWER MANAGEMENT


	Meets ENERGY STAR® standards
--	------------------------------

PACKAGE CONTENTS

	LCD display, power cable, VGA cable, DVI cable, Quick Start Guide, ViewSonic Wizard CD
--	--

WARRANTY

	Three-year limited warranty on parts, labor and backlight.
--	--

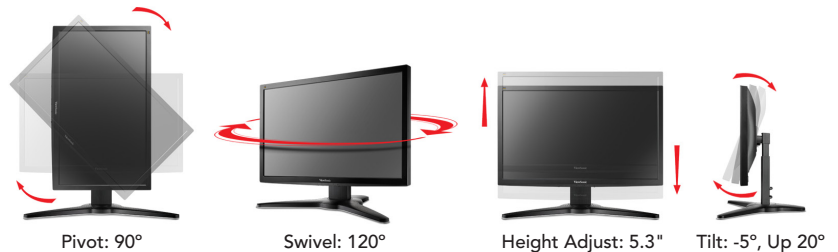

ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

Sales: (888) 881-8781 • SalesInfo@ViewSonic.com • ViewSonic.com

†Adapter may be required. Analog adapter available from ViewSonic. *Power savings may vary based on actual usage and other factors. Specifications subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Windows Vista and the Windows logo are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2011 ViewSonic Corporation. All rights reserved. [15627-01B-07/11] VP2765-LED-1



For more product information, visit us on the web at ViewSonic.com